






RED SQUARE



PAVERS

Data Sheet Double Axe Paver, Anti Skid

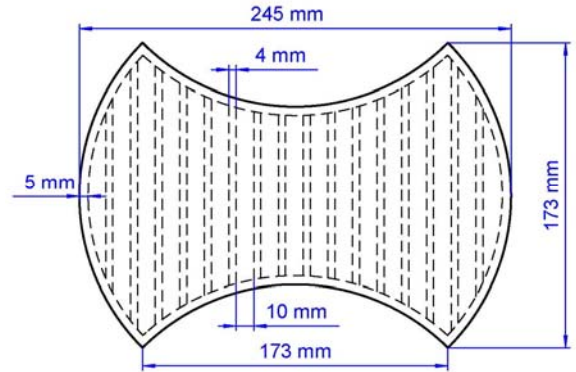

Description:

Double Axe Paver, anti-skid, 24.5 cm x 17.3 cm (9.65 in x 6.81 in), thickness 6 cm (2.36 in) as specified in **ASTM C936** as the minimum thickness. Trafficable. **34** pieces per square meter. The surface is rough. Very suitable for driveways and parking areas. The finished pavements have to be swept with fine sand to fill any spaces between the pavers. Curing time for concrete is 28 days but compression testing should only be carried out after 45 days. Concrete compression testing results above 3000 PSI.

Dimensions available:

Double axe anti-skid	Length	Width	Thickness	Weight	pcs / sqm	Daily Capacity
Double axe anti-skid	24.5 cm	17.3 cm	6.0 cm	3.7 kg	34	(1000)
Double axe anti-skid	9.65 in	6.81 in	2.36 in	8.2 lbs	34	(1000)

Colors:

Colors available are gray (natural concrete), red, yellow, black and green. Other colors available on request. **We only use iron oxide pigments imported from the U.S.**

THESE PAVERS ARE AVAILABLE ONLY FOR ORDERS OF 100,000 PIECES AND ABOVE

IMPORTANT!

If the substrates below the pavers are not well compacted the pavers will give way individually. Therefore always ensure good compaction during installation.