







RED SQUARE



PAVERS

Data Sheet Tactile Paver - Directional Type

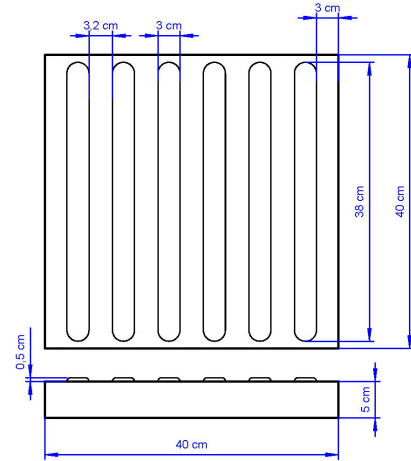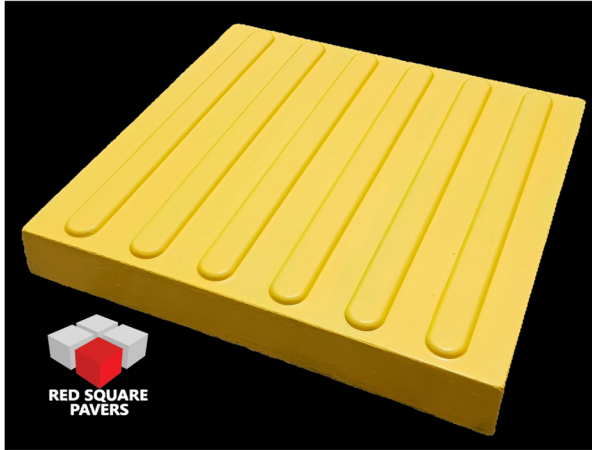

Description:

Directional type tactile paver, for compliance with **Batas Pambansa Bilang 344** as amended by **Republic Act 7277**, 40 x 40 cm (16" x 16"), color yellow, thickness 5 cm (2"). 6.25 pieces per square meter. Concrete compression testing results greater 3000 PSI.

Dimensions available:

Tactile Paver	Length	Width	Thickness	Weight	pcs / sqm	Daily Capacity
Directional Type 5.0	40 cm	40 cm	5.0 cm	15.0 kg	6.25	50
Directional Type 5.0	16.0 in	16.0 in	2.0 in	33.0 lbs	6.25	50

Colors:

Either pigmented or coated in rubberized paint. Colors available are yellow and red. For pigment only the top 2 cm are colored. Other colors available on request. We only use iron oxide pigments imported from the U.S.

The tactile pavers coated in a rubberized paint are slightly shiny and absolutely non-slippery. Available in a bright yellow.

IMPORTANT!

If the substrates below the pavers are not well compacted the pavers will give way individually. Therefore always ensure good compaction during installation.